


SkyDock™ SlimDuo SKD 101 Specifications



Operating input voltage range:	13V - 30V
Main power standby current:	0.2A at 28V
Max. efficiency:	85% per port
Max. output current:	2.7A at 4.75V to 5.25V
USB 2.0 data connection option	
Max. input voltage:	60V
Self reset power surge	
Input/output overvoltage protection	
Static protection to 600V	
Reverse power / short circuit protection	
Battery full charge auto power reduction	
Encapsulated, waterproof circuit board	
Power ON indicator light	
Supports Apple Lightning™ USB requirement	
MTBF:	300,000 hours
Dimensions:	W1.94 in x D2.27 in x H0.64 in
Weight:	2.5 oz
Wire length:	12 in
Positive wire:	White
Negative wire:	White / Black
Design registered*	
Patent pending*	

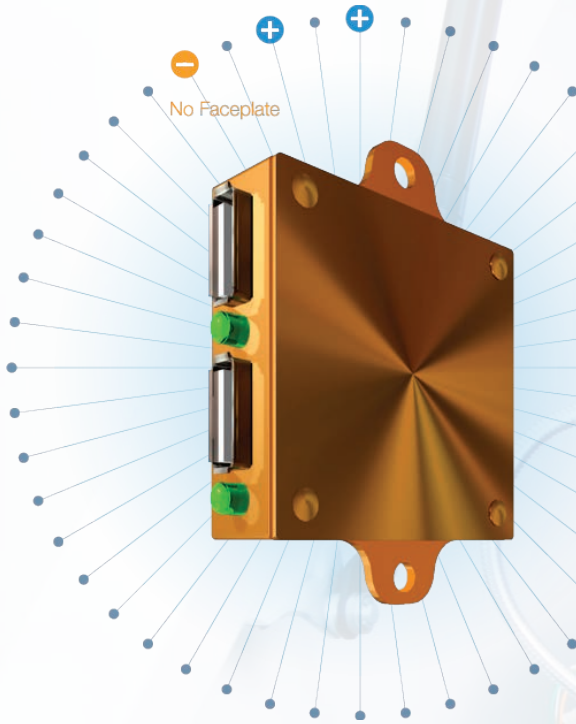

*April 2013